


## **TANK RELIEF VALVES, FLOOR TYPE**

**Model A2550RSN/4—4" Diam. Floor Relief Valve**

**Model A2550RSN/6—6" Diam. Floor Relief Valve**

- The model A2550RSN Hydrostatic Floor Relief Valve is manufactured using an accurately machined bronze seat in the body and a BUNA-N seat in the cover, providing a positive and durable seal.
- The cover and internal strainer are easily removable by manually turning them to release the locking lugs inside of the valve body. Outside pressure will not separate the cover or the grate from the body. The body is designed to accept C900 PVC pipe or ductile iron pipe to extend the standard 8" length to longer lengths as required for the project.

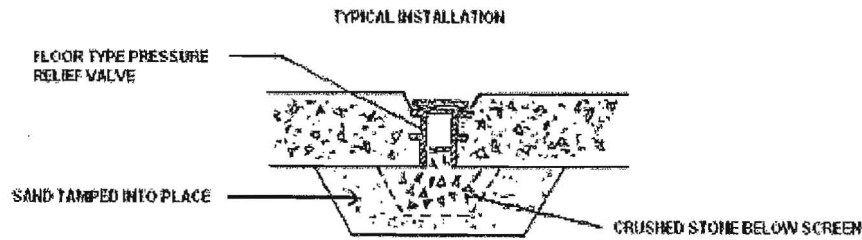

**Hydrostatic Floor Relief Valve**

- The hydrostatic floor relief valve shall have a cast iron body, cover, and removable internal grate. The seat shall be accurately machined bronze and the cover shall have a BUNA-N resilient seat. The valve shall be Model A2550RSN in a 4" or 6" diameter.

*Troy Valve.....simply the best.*

**TROY VALVE**

A Division of Penn-Troy Manufacturing Inc.

**Toll Free: (800) 232-4442 ■ [sales@troyvalve.com](mailto:sales@troyvalve.com)**

**650 Railroad Street, Troy, PA 16947 ■ Ph: (570) 297-4442 Fax: (570) 297-4136**