
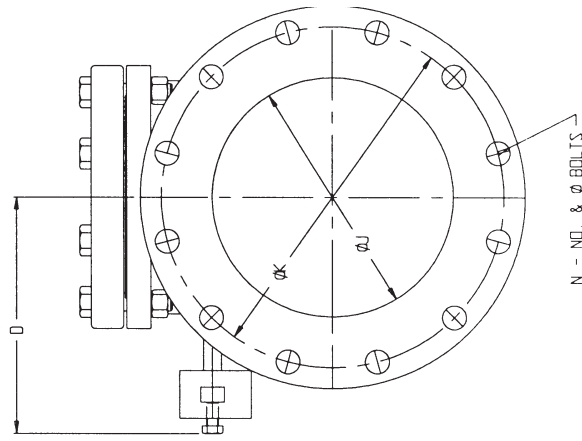



FEATURES:

- Utilizes same components as the figure 106/1106 Swing Check Valves
- 200 psi Working Pressure
- 400 psi Test Pressure
- Available in sizes:
 - 4 x 6, 4 x 8, 6 x 8, 6 x 10, 8 x 10, 8 x 12, 10 x 12
- Available in the following configurations:
 - Figure 1306 – Bronze Seated (Plain)
 - Figure 1306LW – Bronze Seated (with Lever & Weight)
 - Figure 1306A – Resilient Seated (Plain)
 - Figure 1306AW – Resilient Seated (with Lever & Weight)

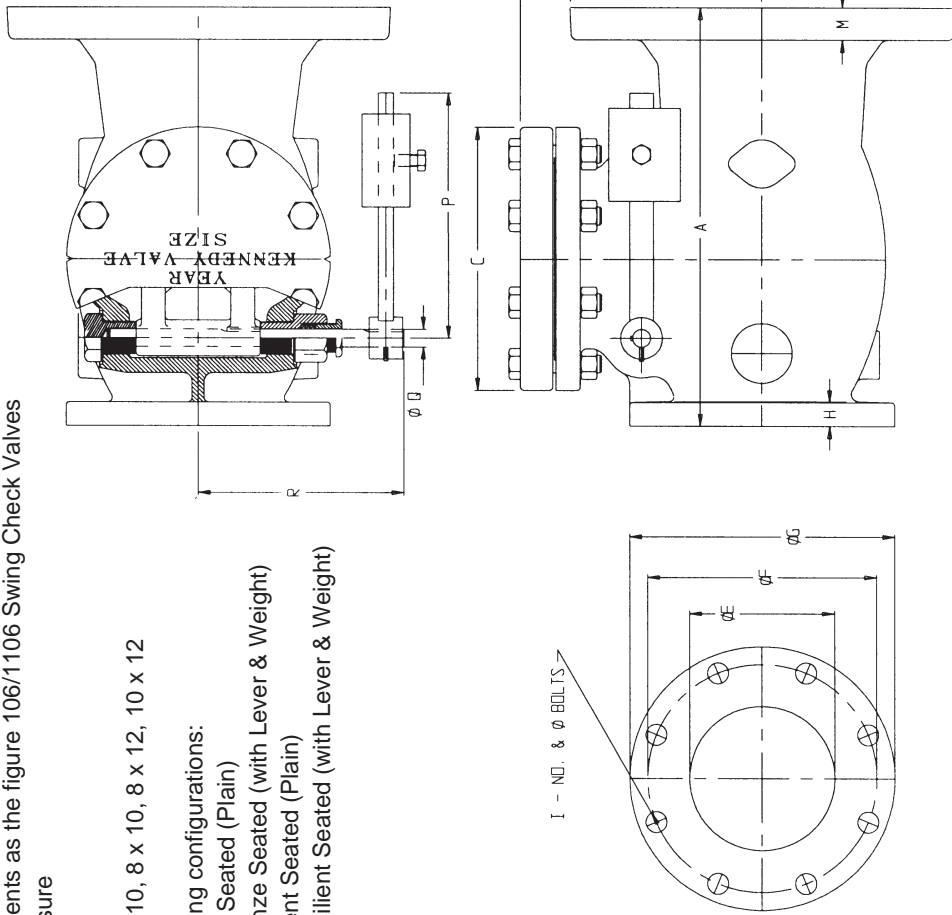

SIZE	A	B	C	D	E	F	G	H APPROX.	I	J	K	L	M	N	P	Q	R
4X6	13.50	8.31	9	10.1	4	7.50	9	0.94	8-0.63	6	9.50	11	1	8-0.75	8.25	0.63	8.19
4X8	15	8.31	9	10.1	4	7.50	9	0.94	8-0.63	8	11.75	13.50	1.13	8-0.75	8.25	0.63	8.19
6X8	17	10.06	11	10.9	6	9.50	11	1	8-0.75	8	11.75	13.50	1.13	8-0.75	10.25	0.75	9.00
6X10	17.50	10.06	11	10.9	6	9.50	11	1	8-0.75	10	14.25	16	1.19	12-0.88	10.25	0.75	9.00
8X10	20	12.38	13.50	12.4	8	11.75	13.50	1.13	8-0.75	10	14.25	16	1.19	12-0.88	14.5	0.88	10.19
8X12	21	12.38	13.50	12.4	8	11.75	13.50	1.13	8-0.75	12	17	19	1.25	12-0.88	14.5	0.88	10.19
10X12	22.50	13.93	16.75	14.7	10	14.25	16	1.19	12-0.88	12	17	19	1.25	12-0.88	18	1.00	11.63


INCREASING CHECK DIMENSIONS
W/LEVER & WEIGHT



 DRAWN BY PMP
 CHECKED
 APPROVED
 DATE 5-2-01
 SCALE NONE
 DWG NO. 31946
 REV.

FEATURES:

- Utilizes same components as the figure 106/1106 Swing Check Valves
- 200 psi Working Pressure
- 400 psi Test Pressure
- Available in sizes: 4 x 6, 4 x 8, 6 x 8, 6 x 10, 8 x 10, 8 x 12, 10 x 12
- Available in the following configurations:
- Figure 1306 – Bronze Seated (Plain)
- Figure 1306LS – Bronze Seated (with Lever & Spring)
- Figure 1306A – Resilient Seated (Plain)
- Figure 1306AS – Resilient Seated (with Lever & Spring)

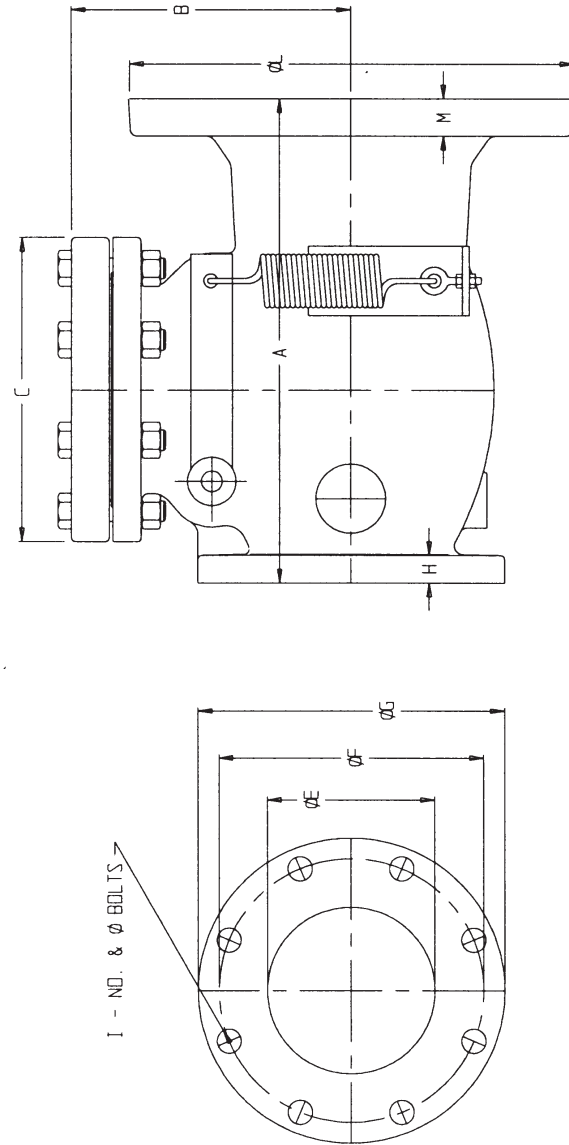

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N
4X6	13.50	8.31	9	8.19	4	7.50	9	0.94	8-0.63	6	9.50	11	1	8-0.75
4X8	15	8.31	9	8.19	4	7.50	9	0.94	8-0.63	8	11.75	13.50	1.13	8-0.75
6X8	17	10.06	11	9	6	9.50	11	1	8-0.75	8	11.75	13.50	1.13	8-0.75
6X10	17.50	10.06	11	9	6	9.50	11	1	8-0.75	10	14.25	16	1.19	12-0.88
8X10	20	12.38	13.50	10.19	8	11.75	13.50	1.13	8-0.75	10	14.25	16	1.19	12-0.88
8X12	21	12.38	13.50	10.19	8	11.75	13.50	1.13	8-0.75	12	17	19	1.25	12-0.88
10X12	22.50	13.93	16.75	11.63	10	14.25	16	1.19	12-0.88	12	17	19	1.25	12-0.88

N - NO. & ø BOLTS →

INCREASING CHECK DIMENSIONS
W/SPRING & LEVER

DRAWN BY PMP	DATE 5-2-01
CHECKED	SCALE NONE
APPROVED	
Kennedy Valve	
DWG NO.	31935
REV.	